


3-Port Atmospherically Referenced

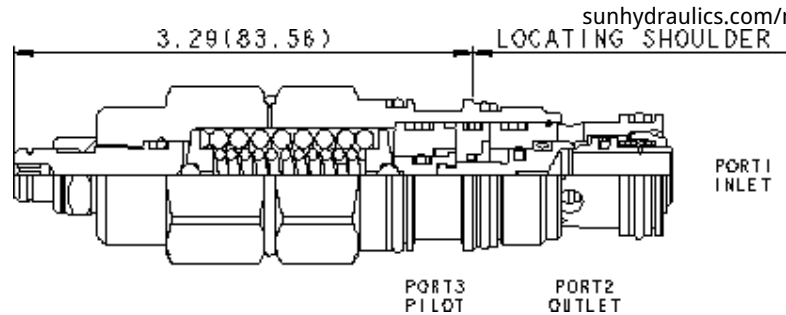

Atmospherically vented counterbalance valves with pilot assist are meant to control an overrunning load. The check valve allows free flow from the directional valve (port 2) to the load (port 1) while a direct-acting, pilot-assisted relief valve controls flow from port 1 to port 2. Pilot assist at port 3 lowers the effective setting of the relief valve at a rate determined by the pilot ratio. Backpressure at port 2 does not affect the valve setting because the spring chamber is atmospherically referenced.

Other names for this valve include motion control valve and over-center valve.

## CONFIGURATION

|                                   |                                                                        |
|-----------------------------------|------------------------------------------------------------------------|
| <b>L</b> Control                  | Standard Screw Adjustment                                              |
| <b>H</b> Functional Setting Range | 1000 - 4000 psi (70 - 280 bar),<br>3000 psi (210 bar) Standard Setting |
| <b>N</b> Seal Material            | Buna-N                                                                 |

## TECHNICAL DATA

NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

|                                                         |                  |
|---------------------------------------------------------|------------------|
| Pilot Ratio                                             | 1:1              |
| Maximum Recommended Load Pressure at Maximum Setting    | 215 bar          |
| Maximum Setting                                         | 280 bar          |
| Factory Pressure Settings Established at                | 30 cc/min.       |
| Maximum Valve Leakage at Reseat                         | 0,3 cc/min.      |
| Check Cracking Pressure                                 | 1,7 bar          |
| Adjustment - No. of CCW Turns from Min. to Max. Setting | 5                |
| Reseat                                                  | >85% of setting  |
| Locknut Hex Size                                        | 15 mm            |
| Locknut Torque                                          | 9 - 10 Nm        |
| Seal kit - Cartridge                                    | Buna: 990302007  |
| Seal kit - Cartridge                                    | Viton: 990302006 |

## CONFIGURATION OPTIONS

Model Code Example: CAEKArray

| CONTROL                                 | (L) FUNCTIONAL SETTING RANGE (H)                                                | SEAL MATERIAL (N) |
|-----------------------------------------|---------------------------------------------------------------------------------|-------------------|
| <b>L</b> Standard Screw Adjustment      | <b>H</b> 1000 - 4000 psi (70 - 280 bar),<br>3000 psi (210 bar) Standard Setting | <b>N</b> Buna-N   |
| <b>C</b> Tamper Resistant - Factory Set | <b>I</b> 400 - 1500 psi (28 - 105 bar),<br>1000 psi (70 bar) Standard Setting   | <b>V</b> Viton    |

# МАГАЗИН ГИДРАВЛИКИ

## RM316.RU



СВЫШЕ  
30 000  
ЕДИНИЦ  
ТОВАРА

Мы предлагаем широкий ассортимент продукции от ведущих производителей гидравлических комплектующих из Европы, США, Турции и Китая.

Наш центральный склад находится в Санкт-Петербурге, отправка товара по России осуществляется транспортными компаниями.

# ПОСТАВЛЯЕМ ПРОДУКЦИЮ БРЕНДОВ

AKG

---

ATOS

---

BADESTNOST

---

BINI

---

DUPLOMATIC

---

EMMEGI

---

EUROFLUID

---

FLUID-PRESS

---

REXROTH

---

FASTER

---

FOX

---

GALTECH

---

GEMELS

---

HBS

---

HAWE HYDRAULIK

---

HV HYDRAULIC

---

HYDRAFORCE

---

KAWASAKI

---

KETA HYDRAULICS

---

MARZOCCHI POMPE

---

NEM

---

MP FILTRI

---

OLEOWEB

---

OMT

---

SUN HYDRAULICS

---

SJ TECHNOLOGY

---

SUNFAB

---

TECNORD

---

WANDFLUH

---

WALVOIL

---

WIKA

---

WINNER HYDRAULICS

---

## ДОСТАВКА ПО РОССИИ

Телефон: + 7 812 448-65-13

E-mail: [info@rm316.ru](mailto:info@rm316.ru)

Сайт: [rm316.ru](http://rm316.ru)

Адрес: Санкт-Петербург, ул.  
Коммуны, 67, литер БМ