



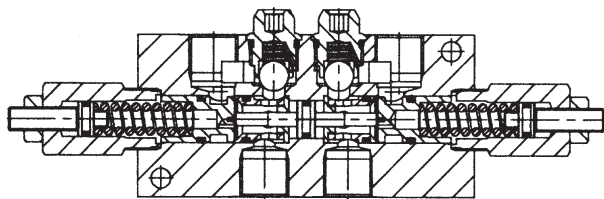


VBSO-DE

05.42.01 - X - Y - Z

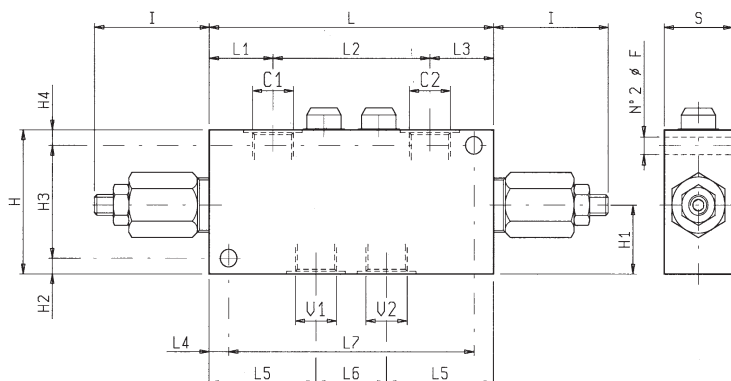

40	155	50	62.5	10	34	107	34	175	60	10	70	10	38	90	10.5	3/4	2.10
35	125	36	54.5	10	32.5	80	32.5	145	60	8	54	8	32	70	8.5	1/2	1.37
S	L7	L6	L5	L4	L3	L2	L1	L	I	H4	H3	H2	H1	H	F	Y	Peso kg Weight kg

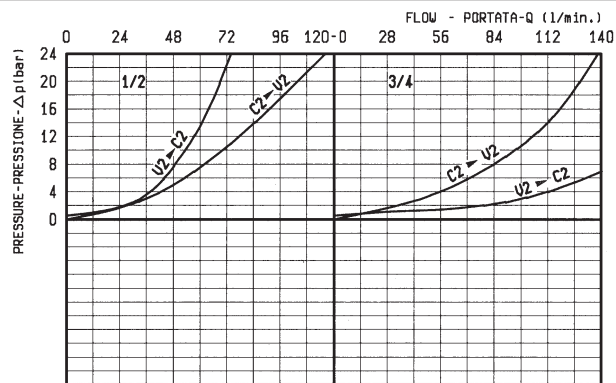

DATI TECNICI / TECHNICAL DATA

Pressione max. 350 bar
Max. pressure

Portata max. vedi diagramma
Flow see performance graph

Taratura della valvola: almeno 1.3 volte superiore
alla pressione indotta dal carico
Pressure setting: at least 1.3 times the load
induced pressure

Cappellotto per piombatura Codice/Ordering code
Sealing Cap 03.05.01.001

X

RAPPORTO DI PILOTAGGIO PILOT RATIO

03

8.2 : 1

10

3.2 : 1

Z

MOLLE / SPRINGS

Z	Campo taratura min - max bar	Incremento press. bar / giro vite	Taratura standard bar (Q = 5 l/min)	Cod. ordinazione	Colore
	Adj. press. range bar	Press. increase bar / turn	Std. setting bar (made at = 5 l/min)	Ordering code	Colour
20	60-210	64	200	03.51.01.021	verde green
35	120-350	106	350	03.51.01.014	giallo yellow

Y

ATTACCHI / PORT SIZE

V1-V2-C1-C2

03

G 1/2

04

G 3/4