


**TECHNICAL DATA**

Max. pressure :	420	bar
Max. flow :	300	l/min
Internal leakage : 200 bar	ave. 350	cm <sup>3</sup> /min
Cavity – Tooling (page 10.010) : CA-16A-2N		
External seals kit : see page 11.012		
Installation torque :	110-120	Nm
Weight :	0.720	kg

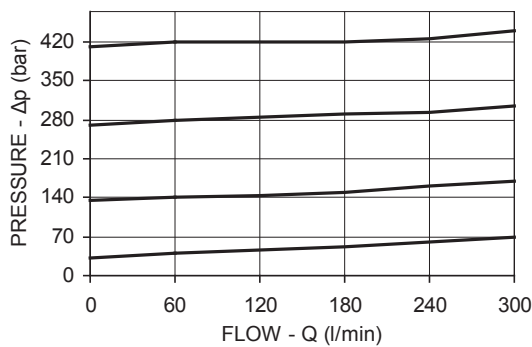

**X ADJUSTMENTS**

<b>03</b>	Leakproof hex. socket screw	
<b>04</b>	Handknob and locknut	

<b>Z</b>	<b>SPRINGS</b>			
	Adj. press. range bar	Press. increase bar/turn		Standard setting bar (Q=5 l/min)
		X = 03	X = 04	
<b>10</b>	35-140	48	38	100
<b>20</b>	70-280	88	70	200
<b>35</b>	140-420	140	110	350

**OPTIONALS**

Ordering code	Description
11.04.23.002	 Tamperproof cap