


MODEL
CXFF

Piston type, hot oil check valve
CAPACITY: 80 L/min. | CAVITY: T-3A



CONFIGURATION

X	Control	Not Adjustable
F	Cracking Pressure	100 psi (7 bar)
N	Seal Material	Buna-N

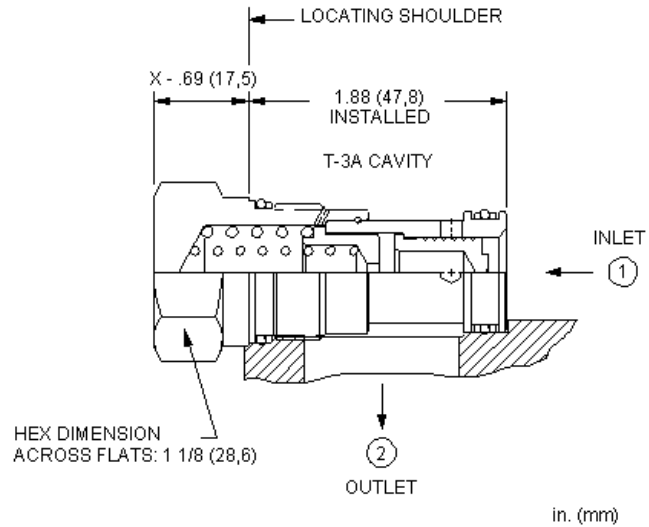

This valve was designed to be used in a parts-in-body, hot oil shuttle assembly. 2 valves, nose to nose, with a pin in between created the low side shuttle.

TECHNICAL DATA

Cavity	T-3A
Series	2
Capacity	80 L/min.
Valve Hex Size	28,6 mm
Valve Installation Torque	61 - 68 Nm
Seal kit - Cartridge	Buna: 990-203-007
Seal kit - Cartridge	Viton: 990-203-006
Model Weight	0.17 kg.

CONFIGURATION OPTIONS

CONTROL

Standard Options	X	Not Adjustable
------------------	---	----------------

CRACKING PRESSURE

Standard Options	F	100 psi (7 bar)
	H	200 psi (14 bar)

SEAL MATERIAL

Standard Options	N	Buna-N
	V	Viton

Copyright © 2002-2014 Sun Hydraulics Corporation. All rights reserved.