


X-Control, H-Poppet

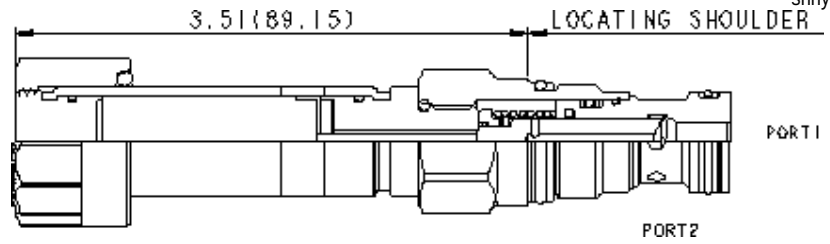

This solenoid-operated 2-way, 2-position cartridge is a direct-acting, poppet-style directional valve. The valve is available in either a normally open or normally closed configuration. Due to the poppet style construction, this valve has extremely low leakage.

CONFIGURATION

X	Control	No Manual Override
H	Poppet Configuration	Normally Open
V	Seal Material	Viton
(none)	Coil	No coil

TECHNICAL DATA

NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Maximum Operating Pressure	350 bar
Response Time - Typical	50 ms
Maximum Valve Leakage at 110 SUS (24 cSt)	0,7 cc/min.@350 bar
Switching Frequency	15000 cycles/hr
Manual Override Force Requirement	33 N/100 bar @ Port 1
Manual Override Stroke	2,5 mm
Seal kit - Cartridge	Buna: 990413007
Seal kit - Cartridge	EPDM: 990413014
Seal kit - Cartridge	Polyurethane: 990413002
Seal kit - Cartridge	Viton: 990413006

NOTES

- Please verify cartridge clearance requirements when choosing a Sun manifold. Different valve controls and coils require different clearances.
- An additional 2.00 inches (50,8 mm) beyond the valve extension is needed for coil installation and removal.

CONFIGURATION OPTIONS

Model Code Example: DTDAXHV

CONTROL	(X)	POPPET CONFIGURATION	(H)	SEAL MATERIAL	(V)	COIL *
X No Manual Override		H Normally Open		V Viton		No coil
D Twist/Lock (Dual) Manual Override		C Normally Closed		N Buna-N		212 DIN 43650-Form A, 12 VDC
L Twist/Lock (Detent) Manual Override				E EPDM		224 DIN 43650-Form A, 24 VDC
M Manual Override						712 Twin Lead, 12 VDC
T Twist (Momentary) Manual Override						724 Twin Lead, 24 VDC
						912 Deutsch DT04-2P, 12 VDC
						924 Deutsch DT04-2P, 24 VDC

* Additional coil options are available