


TECHNICAL DATA

Max. pressure :	420	bar
Max. flow :	120	l/min
Internal leakage : 200 bar	ave. 200	cm ³ /min
Cavity – Tooling (page 10.010) : CA-10A-2N		
External seals kit : see page 11.011		
Installation torque :	50-60	Nm
Weight :	0.210	kg

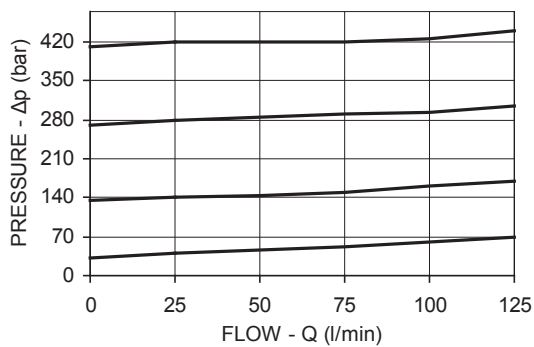

X ADJUSTMENTS

03	Leakproof hex. socket screw	
04	Handknob and locknut	

Z

SPRINGS

		Adj. press. range bar	Press. increase bar/turn	Standard setting bar (Q=5 l/min)		
X = 03	10	35-140	48	100		
	20	70-280	88	200		
	35	140-420	140	350		
X = 04	35	35-350	68	350		

OPTIONALS

Ordering code	Description
11.04.23.002	 Tamperproof cap