



Functional Group:

Products: Manifolds: Line Mount: Counterbalance: 4 Port: Banjo Bolt - Though port 2 with gage port

Model: **X5Y**

Face: 6

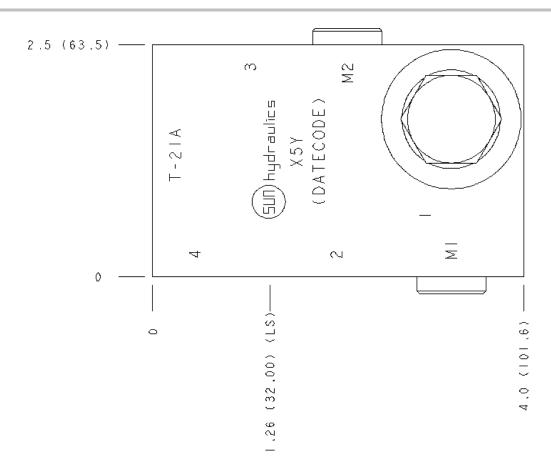



Port Headings and Sizes

X5Y Ports 1 & 2 3/8" BSPP X5Y Ports 3 & 4 1/4" BSPP

Technical Data

	U.S. Units	Metric Units
Cavity	T-21A	
Banjo Bolt Hex	.94	
Banjo Bolt Installation Torque	53 lb. ft. to 58 lb. ft. (70 Nm to 77 Nm)	
Body Features	Through port 2 with gauge port	
Body Type	Line mount	
Interface	Banjo Bolt	
Open Cavity Quantity	1	
Model Weight	1.34 lb.	0.61 kg.

Option Selection U.S. Dollar ▼

Aluminum Body Pressure Rating: **3000 psi (210 bar)**Ductile Iron Body Pressure Rating: **5000 psi (350 bar)**

Model Code Description

X5Y Aluminum, Buna-N, U.S. Units X5Y/S Ductile Iron, Buna-N, U.S. Units

Display Components

Part	Description	Quantity
330-073-002	Connector	1
505-012-002	O-Ring	1
280-048-001	Orifice	1
330-018-002	Plug	2

Special Notes

• Important: Please carefully consider the maximum system pressure to which the manifold will be exposed. The pressure rating of the manifold is dependent on the manifold material, with the port type and sizing a secondary consideration. For example, manifolds constructed of aluminum are not rated for system pressures higher than 3000 psi (210 bar), regardless of the port type and size specified.

Copyright © 2002-2012 Sun Hydraulics Corporation. All rights reserved. Terms and Conditions - ISO Certification - Statement of Privacy