


**TECHNICAL DATA**

Max. pressure :	350	bar
Max. flow :	50	l/min
Cavity – Tooling (page 10.010) : CA-10A-2N		
External seals kit : see page 11.011		
Installation torque :	50-60	Nm
Weight :	0.195	kg

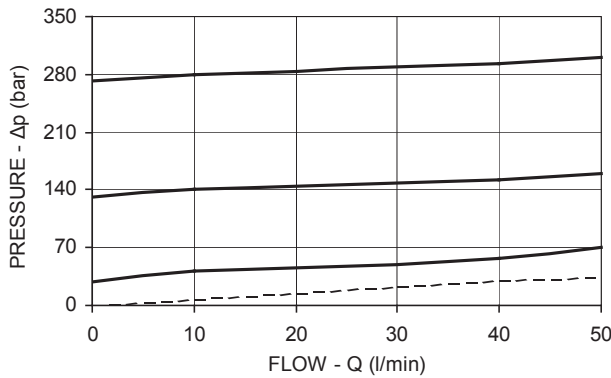

**X ADJUSTMENTS**

**03** Leakproof hex. socket screw



**SPRINGS**

Z	SPRINGS				
	Adj.press. range bar	Press.increase bar/turn	Std.setting bar (Q=5 l/min)	Ordering code	Colour
10	35-140	50	100		
20	105-210	79	200		
35	175-350	170	350		

**OPTIONALS**

Ordering code	Description
11.04.23.002	 Tamperproof cap



Tamperproof cap