



FLOW CONTROL VALVE TVTP-...-P-...

- NG 6, 10
- Up to 210 Bar [3046 PSI]
- Up to 90 l/min [23,8 GPM]
- Three-way pressure compensated.
- Operating element: proportional solenoid.
- Control electronics: Amplifier P/N: 1659574.
- For independent fitting into a block.
- Plug-in connector for solenoids to ISO 4400.
- Protection of solenoid IP 54 to EN 60529 / IEC 60529 (IP 65 on request).




TVTP-...-P-...

Operation

TVTP three-way flow regulators are used to regulate the priority flow in outlet 3 to a maximum adjustable level largely independent of the load and pressure conditions. The surplus flow is diverted to the bypass port 2. The bypass flow may be used for a secondary circuit.

Whether the pressure in secondary circuit is higher than the regulated pressure the valve works as two-way regulator.

Hydraulic symbol




Features

Type		TVTP-25	TVTP-50	TVTP-90
Rated flow 3	l/min [GPM]	25 [6,6]	50 [13,2]	90 [23,8]
Flow rate 1 max.	l/min [GPM]	60 [15,9]	90 [23,8]	150 [39,6]
Operating pressure max.	Bar [PSI]		210 [3045,8]	
Hysteresis	%		<5	
Flow constant according to load pressure	%		<±2	
Oil temperature range	°C [°F]		-20 to +70 [-4 to +158]	
Viscosity range	mm²/s [SUS]		15 to 380 [69,5 to 1761]	
Filtration	NAS 1638		7	
Mass	kg [lbs]	1 [2,2] (TVTP-..)	1,6 [3,5] (TVTP-..)	2 [4,4] (TVTP-..G)
Power	W	1,2 [2,6] (TVTP-..G)	17,4	20,8
Voltage	V		12 and 24 DC	
Rated current at 12 V	A		1,25	1,79
Rated current at 24 V	A		0,68	0,81
Coil resistance at 12 V; 20 °C [68 °F]	Ohm		7,2	4,3
Coil resistance at 24 V; 20 °C [68 °F]	Ohm		24,6	21
Rating ED	%		100	


Solenoid current / flow curves

Measured at 50°C [122°F] and viscosity of 32 mm²/s [148 SUS].

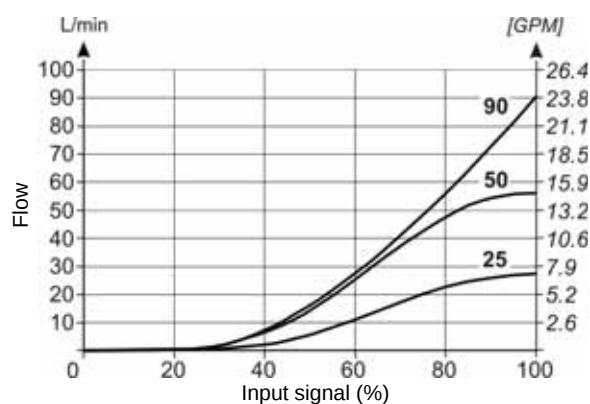




Dimensions

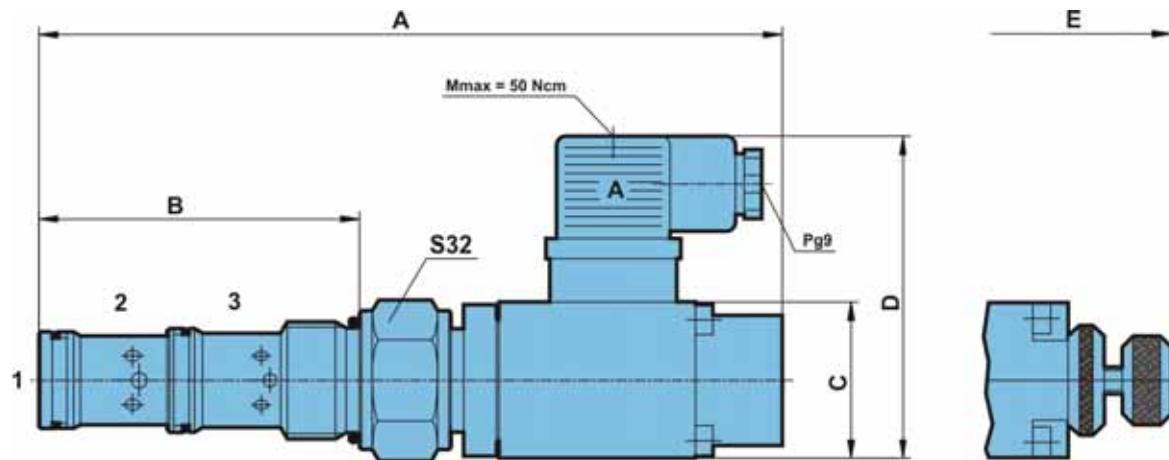


	A mm [Zoll]	B mm [Zoll]	C mm [Zoll]	D mm [Zoll]	E mm [Zoll]	S	Torque into cavity Nm [in.lbf]
TVTP-25-P	170 [6,7]	73,5 [2,9]	35 [1,4]	74 [2,9]	210 [8,3]	S32	60-65 [531-575]
TVTP-50-P							
TVTP-90-P	198 [7,8]	75 [3,0]	45 [1,8]	84 [3,3]	244 [9,6]	S41	70-75 [619-664]

Dimensions of cavity

TVTP-25 and 50

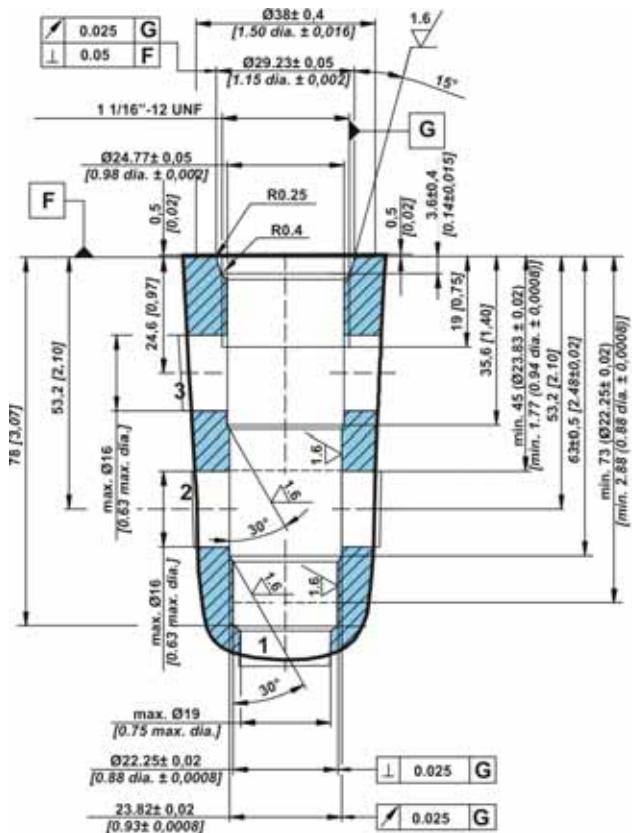


TVTP-90

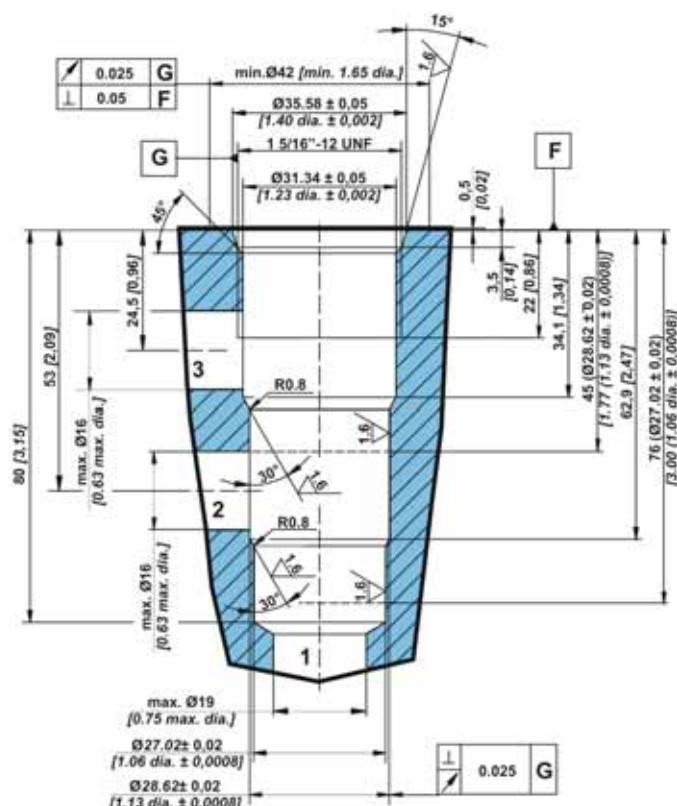




Standard ported body - steel

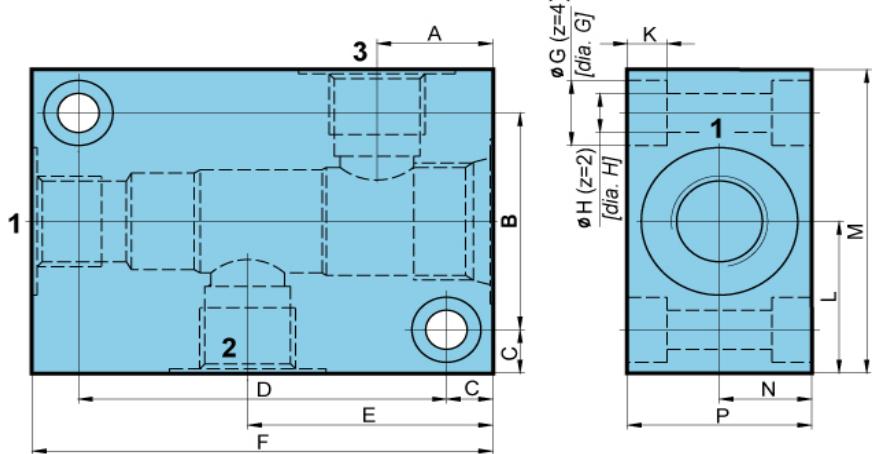

P-TVTP-50 mm [Zoll]	P-TVTP-90 mm [Zoll]
A 25,1 [0,99]	25 [0,98]
B 50 [1,97]	65 [2,56]
C 10 [0,40]	15 [0,59]
D 80 [3,15]	80 [3,15]
E 53,2 [2,10]	53,5 [2,11]
F 100 [3,94]	110 [4,33]
G 15 [0,59]	17 [0,67]
H 9 [0,35]	11 [0,43]
K 8,6 [0,34]	10,6 [0,42]
L 35 [1,37]	47,5 [1,87]
M 70 [2,75]	95 [3,74]
N 20 [0,78]	26 [1,02]
P 40 [1,57]	52 [2,05]
U G 1/2	G 1

Threaded connections to ISO 1179-1.

Model code

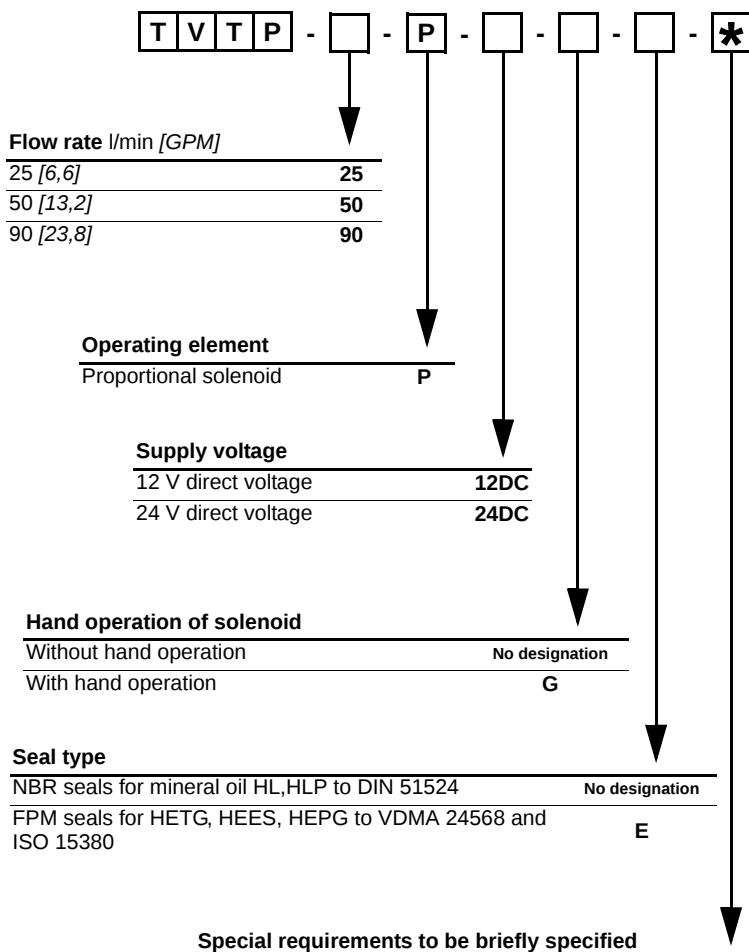

Throttle with Check valves

Flow control valves pressure compensated

Flow dividers