


3-Port Atmospherically Referenced

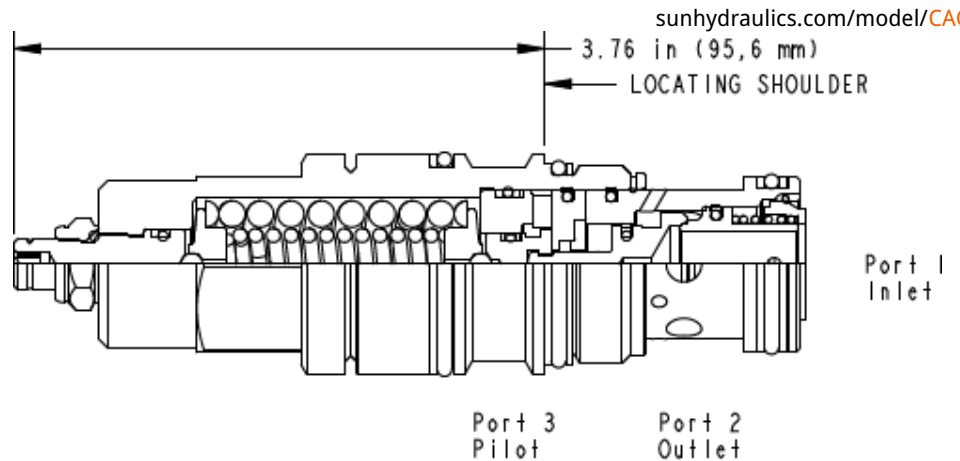

CONFIGURATION

L	Control	Standard Screw Adjustment
G	Functional Setting Range	2000 - 6000 psi (140 - 420 bar), 4000 psi (280 bar) Standard Setting
N	Seal Material	Buna-N
(none) Material/Coating		

Atmospherically vented counterbalance valves with pilot assist are meant to control an overrunning load. The check valve allows free flow from the directional valve (port 2) to the load (port 1) while a direct-acting, pilot-assisted relief valve controls flow from port 1 to port 2. Pilot assist at port 3 lowers the effective setting of the relief valve at a rate determined by the pilot ratio. Backpressure at port 2 does not affect the valve setting because the spring chamber is atmospherically referenced.

Other names for this valve include motion control valve and over-center valve.

TECHNICAL DATA

NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Pilot Ratio	5:1
Maximum Recommended Load Pressure at Maximum Setting	320 bar
Maximum Setting	420 bar
Factory Pressure Settings Established at	30 cc/min.
Maximum Valve Leakage at Reseat	0,3 cc/min.
Check Cracking Pressure	1,7 bar
Adjustment - No. of CCW Turns from Min. to Max. Setting	5
Reseat	>85% of setting
Locknut Hex Size	15 mm
Locknut Torque	9 - 10 Nm
Seal kit - Cartridge	Buna: 990117007
Seal kit - Cartridge	Polyurethane: 990117002
Seal kit - Cartridge	Viton: 990117006

CONFIGURATION OPTIONS

Model Code Example: CAGGLGN

CONTROL	(L)	FUNCTIONAL SETTING RANGE (G)	SEAL MATERIAL	(N)	MATERIAL/COATING
L Standard Screw Adjustment		G 2000 - 6000 psi (140 - 420 bar), 4000 psi (280 bar) Standard Setting	N Buna-N		Standard Material/Coating
C Tamper Resistant - Factory Set		F 1000 - 2500 psi (70 - 175 bar), 2000 psi (140 bar) Standard Setting	V Viton		/AP Stainless Steel, Passivated

МАГАЗИН ГИДРАВЛИКИ

RM316.RU



СВЫШЕ
30 000
ЕДИНИЦ
ТОВАРА

Мы предлагаем широкий ассортимент продукции от ведущих производителей гидравлических комплектующих из Европы, США, Турции и Китая.

Наш центральный склад находится в Санкт-Петербурге, отправка товара по России осуществляется транспортными компаниями.

ПОСТАВЛЯЕМ ПРОДУКЦИЮ БРЕНДОВ

AKG

ATOS

BADESTNOST

BINI

DUPLOMATIC

EMMEGI

EUROFLUID

FLUID-PRESS

REXROTH

FASTER

FOX

GALTECH

GEMELS

HBS

HAWE HYDRAULIK

HV HYDRAULIC

HYDRAFORCE

KAWASAKI

KETA HYDRAULICS

MARZOCCHI POMPE

NEM

MP FILTRI

OLEOWEB

OMT

SUN HYDRAULICS

SJ TECHNOLOGY

SUNFAB

TECNORD

WANDFLUH

WALVOIL

WIKA

WINNER HYDRAULICS

ДОСТАВКА ПО РОССИИ

Телефон: + 7 812 448-65-13

E-mail: info@rm316.ru

Сайт: rm316.ru

Адрес: Санкт-Петербург, ул.
Коммуны, 67, литер БМ