
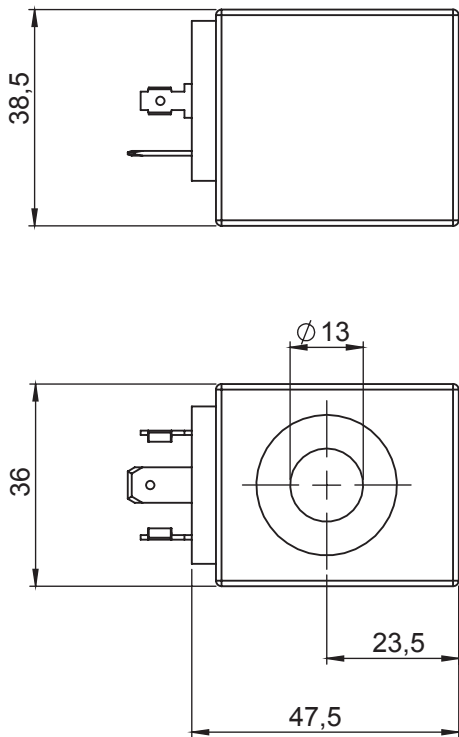


COIL - TUBE Ø 1322 W


- Wire insulation class.H (>185°C)
- ED.100%
- Coil power at 20° C.22 W
- Ambient temperature-20 +40° C
- Weight.0,19 Kg

ELECTRIC CIRCUITS

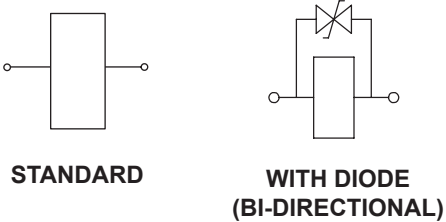


AMP - JUNIOR

AMP - SUPER SEAL

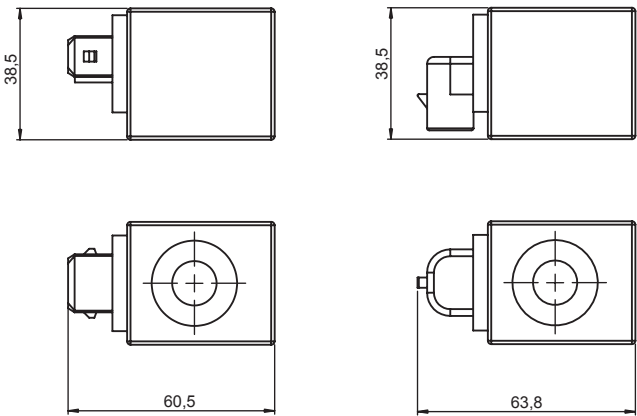

CABLE



Note:
- Coil interchangeable with CT-9400 model.

CONNECTOR	PROTECTION CLASS	COIL THERMAL INSULATION CLASS	VOLTAGE [V]	RESISTANCE [Ω]	CIRCUIT	ORDERING CODE
DIN 43650	IP65*	F	12 V dc	6,5	STANDARD	092001130
DIN 43650	IP65*	F	14 V dc	8,9	STANDARD	092001132
DIN 43650	IP65*	F	24 V dc	26,5	STANDARD	092002130
DIN 43650	IP65*	F	26 V dc	30,6	STANDARD	092002132
AMP-JUNIOR	IP65*	F	12 V dc	6,5	STANDARD	092201130
AMP-JUNIOR	IP65*	F	24 V dc	26,5	STANDARD	092202130
AMP-JUNIOR	IP65*	H	26 V dc	32,5	WITH DIODE	092202132
CABLE L=300mm	IP65*	F	14 V dc	8,9	STANDARD	092601130
CABLE L=300mm	IP65*	F	26 V dc	30,6	STANDARD	092602130
AMP-SUPER SEAL	IP67*	F	24 V dc	26,5	STANDARD	092702130

* Protection index with standard connector

