


**TECHNICAL DATA**

Max working pressure:	350	bar
Max flow:	30	l/min
Pilot ratio:	10:1	
Installation torque:	41-49 Nm (max 90°)	
Weight:	0.6	Kg

**WARNING:** it is recommended to connect the air bleed port (G1/8) to tank.  
The version with Z=01 in part no. (heavier spring) is generally recommended.

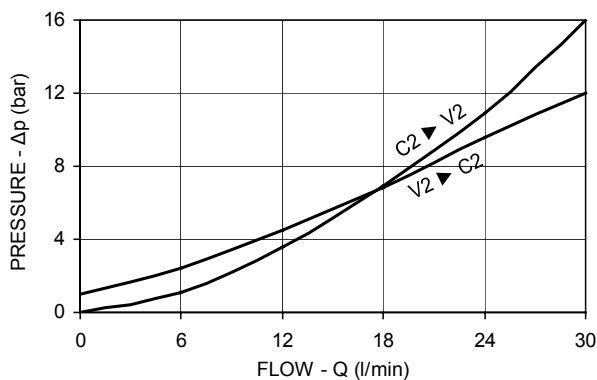

**X O-RING ON PILOT PISTON**

**00** With O-Ring

Z	SPRINGS			
	Cracking pressure bar			Ordering code
<b>00</b>	1			03.51.01.317
<b>01</b>	4.5			03.51.01.318

Y	PORT SIZE	
	V2-C2	Pil
<b>02</b>	G 3/8	G 1/4