


**TECHNICAL DATA**

Max. pressure :	420	bar
Max. flow :	150	l/min
Leakage : 0.10 l/min approx. at max. relief setting.		
Special Cavity (page 10.411) : 065		
Installation torque :	121-133	Nm
Weight :	0.280	kg

Suitable for applications where pressure in the return line "T" never exceeds the pressure in the "P" line.

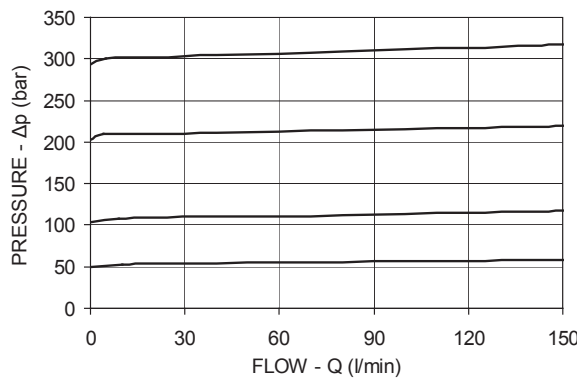

**X ADJUSTMENTS**

<b>03</b>	Leakproof inner hex. socket screw	
<b>04</b>	Handknob and locknut panel mounting	

**SPRINGS**

<b>Z</b>	<b>SPRINGS</b>			
	Adj.press. range bar	Press.increase bar/turn	Std.setting bar (Q=5 l/min)	Colour
<b>05</b>	1.7-70	20.5	50	black
<b>10</b>	7-105	26	100	blue
<b>20</b>	10-210	35	200	green
<b>40</b>	35-420	115	350	yellow

**OPTIONALS**

Ordering code	Description
03.05.01.004	 Sealing cap