

“Z” TYPE COIL

DESCRIPTION

3/4 inch (19 mm) I.D. Coil.
Color identification: black







FEATURES

One piece encapsulated design that is:

- Immersion proof
- No external metal shell
- Internal arc suppression diode available on request

COIL SPECIFICATION

Wattage	26 Watts Nominal
Duty Rating	Continuous Duty ±10% rated voltage at 120°F (49°C) ambient
Min Current for Actuation	80% of rated current at room temperature
Magnet Wire Class	H
Heat insulation Class	F
Ambient Temperature Range	-30° to 60°C
Protection degree	Up to IP 65 (with connector and suitable seals)
Encapsulation Material	Glass filled polyester, resistant to moisture, caustic solutions, fungus and vibration

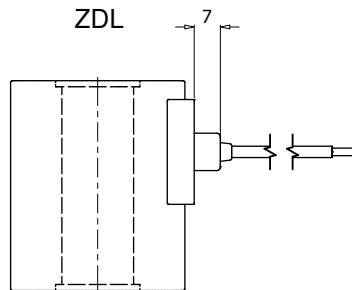

ORDERING INFORMATION

Z	-	-	-	
TERMINATIONS				VOLTAGE
Double Lead (L=230mm)	DL		12	12 VDC
DIN 43650 (Hirschmann)	HC		24	24 VDC
AMP Junior Timer - Integral	JT			
Deutsch - Integral DT04-2P	DI			

Approximate Coil Weight: .56 lbs (.25 kg)

WARNING: the specifications/application data shown in our catalogs and data sheets are intended only as a general guide for the product described (herein). Any specific application should not be undertaken without independent study, evaluation, and testing for suitability.