


## CONFIGURATION

|        |                   |                  |
|--------|-------------------|------------------|
| X      | Control           | Standard Pilot   |
| F      | Cracking Pressure | 100 psi (7 bar)  |
| N      | Seal Material     | Buna-N           |
| (none) |                   | Material/Coating |

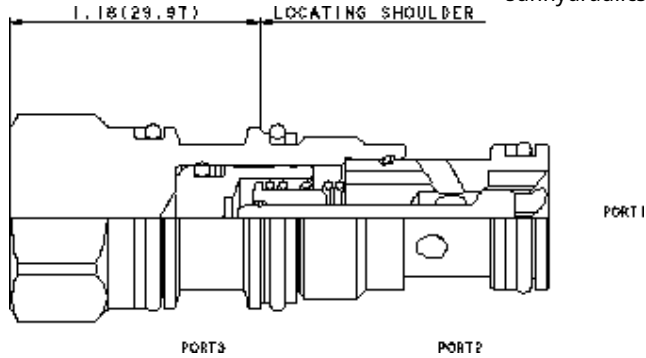

This valve is a pilot to open check valve. It has a sealed pilot, a steel seat, and is non-vented. It allows free flow from the valve (port 2) to the load (port 1) and blocks flow in the opposite direction. Pressure at the pilot (port 3) will open the valve from port 1 to port 2. Pilot pressure needed at port 3 to open the valve is directly proportional to the load pressure at port 1. Pressure at port 2 directly opposes pilot pressure.

## TECHNICAL DATA

NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

|                                           |                         |
|-------------------------------------------|-------------------------|
| Maximum Operating Pressure                | 350 bar                 |
| Pilot Ratio                               | 3:1                     |
| Maximum Valve Leakage at 110 SUS (24 cSt) | 0,07 cc/min.            |
| Seal kit - Cartridge                      | Buna: 990011007         |
| Seal kit - Cartridge                      | EPDM: 990011014         |
| Seal kit - Cartridge                      | Polyurethane: 990011002 |
| Seal kit - Cartridge                      | Viton: 990011006        |

## CONFIGURATION OPTIONS

Model Code Example: CKCDXFN

| CONTROL               | (X) CRACKING PRESSURE | (F) SEAL MATERIAL | (N) MATERIAL/COATING            |
|-----------------------|-----------------------|-------------------|---------------------------------|
| X Standard Pilot      | F 100 psi (7 bar)     | N Buna-N          | Standard Material/Coating       |
| L Manual Load Release | A 4 psi (0,3 bar)     | E EPDM            | /AP Stainless Steel, Passivated |
|                       | B 15 psi (1 bar)      | V Viton           | /LH Mild Steel, Zinc-Nickel     |
|                       | C 30 psi (2 bar)      |                   |                                 |
|                       | D 50 psi (3,5 bar)    |                   |                                 |
|                       | E 75 psi (5 bar)      |                   |                                 |
|                       | G 150 psi (10,5 bar)  |                   |                                 |

# МАГАЗИН ГИДРАВЛИКИ

## RM316.RU



СВЫШЕ  
30 000  
ЕДИНИЦ  
ТОВАРА

Мы предлагаем широкий ассортимент продукции от ведущих производителей гидравлических комплектующих из Европы, США, Турции и Китая.

Наш центральный склад находится в Санкт-Петербурге, отправка товара по России осуществляется транспортными компаниями.

# ПОСТАВЛЯЕМ ПРОДУКЦИЮ БРЕНДОВ

AKG

---

ATOS

---

BADESTNOST

---

BINI

---

DUPLOMATIC

---

EMMEGI

---

EUROFLUID

---

FLUID-PRESS

---

REXROTH

---

FASTER

---

FOX

---

GALTECH

---

GEMELS

---

HBS

---

HAWE HYDRAULIK

---

HV HYDRAULIC

---

HYDRAFORCE

---

KAWASAKI

---

KETA HYDRAULICS

---

MARZOCCHI POMPE

---

NEM

---

MP FILTRI

---

OLEOWEB

---

OMT

---

SUN HYDRAULICS

---

SJ TECHNOLOGY

---

SUNFAB

---

TECNORD

---

WANDFLUH

---

WALVOIL

---

WIKA

---

WINNER HYDRAULICS

---

## ДОСТАВКА ПО РОССИИ

Телефон: + 7 812 448-65-13

E-mail: [info@rm316.ru](mailto:info@rm316.ru)

Сайт: [rm316.ru](http://rm316.ru)

Адрес: Санкт-Петербург, ул.  
Коммуны, 67, литер БМ