




Type VBPSL/T
pilot operated check valves

- Single acting

Technical specifications and diagrams are measured with mineral oil of 46 cSt viscosity at 40°C (104°F) temperature.

		VBPSL/T 38	VBPSL/T 12	VBPSL/T 34
Nominal flow		25 l/min (6.6 US gpm)	50 l/min (13.2 US gpm)	100 l/min (26.4 US gpm)
Max. pressure		Aluminium body = 210 bar (3050 psi) Steel body = 350 bar (5100 psi)		
Oil leakage		0.25 cm³/min (0.015 in³/min) at 210 bar (3050 psi)		
Fluid		mineral based oil		
Viscosity		from 10 to 200 cSt		
Max. level of contamination		18/16/13 ISO4406		
Fluid temperature		with NBR seals: from -20°C (-4°F) to 80°C (176°F)		
Environmental temp. for working conditions		from -40°C (-40°F) to 100°C (212°F)		
Weight	aluminium	0.48 kg (1.06 lb)	0.75 kg (1.65 lb)	1.79 kg (3.95 lb)
	steel	1.16 kg (2.56 lb)	1.63 kg (3.59 lb)	4.19 kg (9.24 lb)

NOTE - For different conditions, please contact Walvoil Sales Dpt.




Dimensions

Valve type	All ports
VBPSL/T 38	G3/8
VBPSL/T 12	G1/2
VBPSL/T 34	G3/4
Valve type	All ports
VBPSL/T 12/SAE	SAE10
VBPSL/T 34/SAE	SAE12


Dimensions are in mm-in

Valve type	A	B	C	D	E	F	G	H	I	L	M	N	O	P	ØY
VBPSL/T 38	35 1.38	17.5 0.69	14.5 0.57	80 3.15	14.5 0.57	49.5 1.95	16 0.63	31.5 1.24	34 1.34	60 2.36	32 1.26	10 0.39	40 1.57	20 0.79	8.5 0.33
VBPSL/T 12	35 1.38	17.5 0.69	13 0.51	90 3.54	18 0.71	51 2.01	21 0.83	38 1.50	34 1.34	70 2.75	35 1.38	15 0.59	40 1.57	20 0.79	8.5 0.33
VBPSL/T 34	50 1.97	25 0.98	16.5 0.65	135 5.31	22 0.87	83 3.27	30 1.18	57.5 2.26	55.5 2.18	90 3.54	55 2.16	20 0.79	50 1.97	25 0.98	10.5 0.41
VBPSL/T 34/SAE															

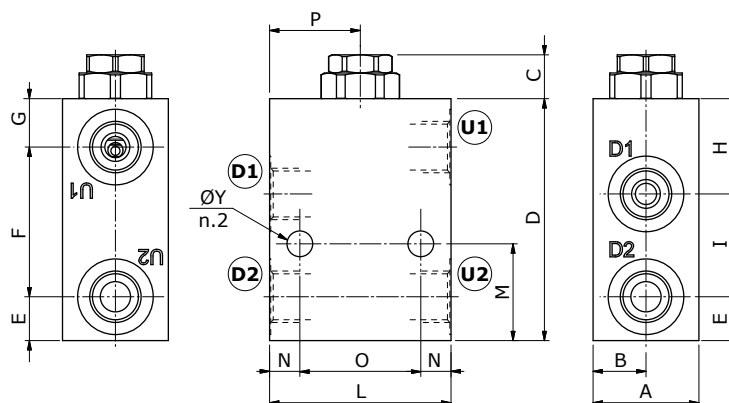

Ordering codes and description composition

Port size — Pilot ratio
VBPSL/T 38/p4



VBPSL/T complete valves

TYPE	CODE	DESCRIPTION
VBPSL/T 38/p4	1412021100	Aluminium body, pilot ratio 1:4, G3/8 ports
VBPSL/T 38/p4/ac	1412022100	Steel body, as previous one
VBPSL/T 12/p4	1412031100	Aluminium body, pilot ratio 1:4, G1/2 ports
VBPSL/T 12/p4/ac	1412032100	Steel body, as previous one
VBPSL/T 34/p4	1412041100	Aluminium body, pilot ratio 1:4, G3/4 ports
VBPSL/T 34/p4/ac	1412042101	Steel body, as previous one
VBPSL/T 12/p4/SAE	1412031200	Aluminium body, pilot ratio 1:4, SAE10 ports
VBPSL/T 34/p4/SAE	1412042200	Aluminium body, pilot ratio 1:4, SAE12 ports

For other steel body configurations, other port sizes, SAE thread and configurations with FPM (Viton) seals, please contact our Sales Dpt.

Rating diagram

