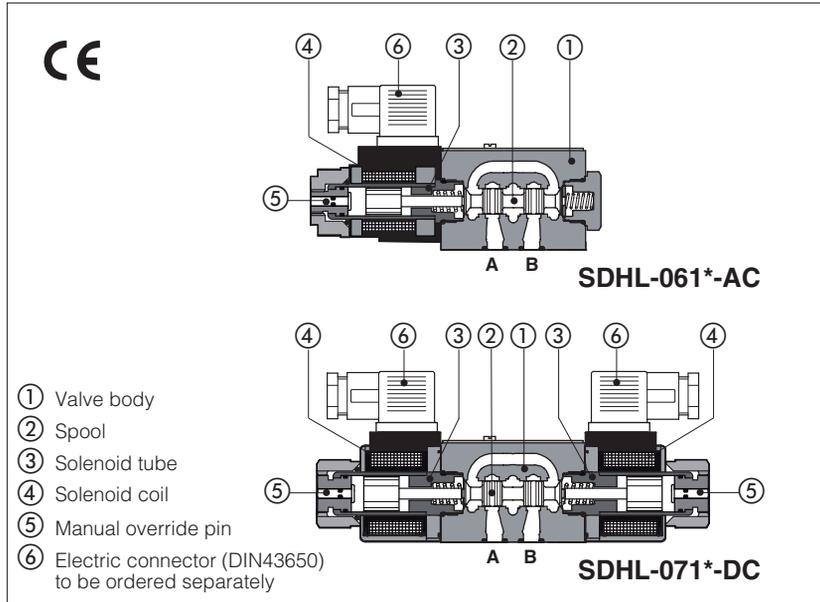


# Solenoid directional valves type SDHL - compact execution

direct operated, ISO 4401 size 06



Spool type, two or three position direct operated valves size 06 in compact execution with reduced solenoids dimensions, ideal for applications in mini power packs, mobile and agricultural machines.

Solenoids are made by:

- wet type screwed tube (3), different for AC and DC power supply, with integrated manual override pin (5)
- interchangeable coils (4), specific for AC or DC power supply, easily replaceable without tools - see section (5) for available voltages

Standard coils protection **IP65**

Wide range of interchangeable spools (2), see section (2).

The valve body (1) is 3 chamber type made by shell-moulding casting with wide internal passages ensuring low pressure drops.

Mounting surface: **ISO 4401 size 06**

Max flow: **40 l/min**
















Max pressure: **350 bar**

- ① Valve body
- ② Spool
- ③ Solenoid tube
- ④ Solenoid coil
- ⑤ Manual override pin
- ⑥ Electric connector (DIN43650) to be ordered separately

## 1 MODEL CODE

<b>SDHL - 0</b>	<b>61</b>	<b>1</b>	<b>/A</b>	<b>-</b>	<b>X</b>	<b>24 DC</b>	<b>**</b>	<b>/*</b>
Directional control valves size 06 compact execution								Seals material, see section (4): - = NBR PE = FKM
Valve configuration, see section (2) <b>61</b> = single solenoid, center plus external position, spring centered <b>63</b> = single solenoid, 2 external positions, spring offset <b>71</b> = double solenoid, 3 positions, spring centered <b>75</b> = double solenoid, 2 external positions, with detent							Series number	
Spool type, see section (2).							Voltage code, see section (5)	
Options: <b>A, WP</b> , see section (5)								
					<b>X</b> = without connector See section (6) for available connectors, to be ordered separately			

## 2 CONFIGURATIONS and SPOOLS (representation according to ISO 1219-1)

Configurations	Spools	Configurations	Spools
  	             	  	    <p>(1) not available for configuration 75</p>

### 2.1 Special spools

- spools type **0** and **3** are also available as **0/1** and **3/1** with restricted oil passages in central position, from user ports to tank.
- spools type **1**, **4**, **5** and **58** are also available as **1/1**, **4/8**, **5/1** and **58/1**. They are properly shaped to reduce water-hammer shocks during the switching.
- spools type **1**, **1/2**, **3**, **8** are available as **1P**, **1/2P**, **3P**, **8P** to limit valve internal leakages.
- Other types of spools can be supplied on request.

### 3 MAIN CHARACTERISTICS

Assembly position / location	Any position
Subplate surface finishing	Roughness index Ra 0,4 - flatness ratio 0,01/100 (ISO 1101)
Ambient temperature	<b>Standard</b> execution = -30°C ÷ +70°C <b>/PE</b> option = -20°C ÷ +70°C
Flow direction	As shown in the symbols of table 2
<b>Operating pressure</b>	Ports P,A,B: <b>350</b> bar; Port T <b>210</b> bar for DC version; <b>160</b> bar for AC version
<b>Maximum flow</b>	<b>40 l/min</b> , see Q/Δp diagram at section 8 and operating limits at section 9

#### 3.1 Coils characteristics

Insulation class	<b>H</b> (180°C) for DC coils <b>F</b> (155°C) for AC coils Due to the occurring surface temperatures of the solenoid coils, the European standards EN ISO 13732-1 and EN ISO 4413 must be taken into account
Protection degree to DIN EN 60529	<b>IP 65</b> (with connectors 666, 667 correctly assembled)
Relative duty factor	100%
Supply voltage and frequency	See electric feature 6
Supply voltage tolerance	± 10%

### 4 SEALS AND HYDRAULIC FLUID - for other fluids not included in below table, consult our technical office

Seals, recommended fluid temperature	NBR seals (standard) = -20°C ÷ +60°C, with HFC hydraulic fluids = -20°C ÷ +50°C FKM seals (/PE option) = -20°C ÷ +80°C		
Recommended viscosity	15 ÷ 100 mm <sup>2</sup> /s - max allowed range 2,8 ÷ 500 mm <sup>2</sup> /s		
Fluid contamination class	ISO 4406 class 21/19/16 NAS 1638 class 10, in line filters of 25 μm (β10 ≥75 recommended)		
<b>Hydraulic fluid</b>	<b>Suitable seals type</b>	<b>Classification</b>	<b>Ref. Standard</b>
Mineral oils	NBR, FKM	HL, HLP, HLPD, HVLP, HVLPD	DIN 51524
Flame resistant without water	FKM	HFDU, HFDR	ISO 12922
Flame resistant with water	NBR	HFC	

### 5 OPTIONS

#### Options

- A** = Solenoid mounted at side of port B (only for single solenoid valves). In standard versions, solenoid is mounted at side of port A.  
**WP** = prolonged manual override protected by rubber cap.

⚠ The manual override operation can be possible only if the pressure at T port is lower than 50 bar

### 6 ELECTRIC FEATURES

External supply nominal voltage ± 10%	Voltage code	Type of connector	Power consumption (2)	Code of spare coil SDHL
12 DC	<b>12 DC</b>	666 or 667	22 W	COL-12DC
14 DC	<b>14 DC</b>			COL-14DC
24 DC	<b>24 DC</b>			COL-24DC
28 DC	<b>28 DC</b>			COL-28DC
110/50 AC (1)	<b>110/50/60 AC</b>	666 or 667	58 VA (3)	COL-110/50/60AC
230/50 AC (1)	<b>230/50/60 AC</b>			COL-230/50/60AC

(1) Coil can be supplied also with 60 Hz of voltage frequency: in this case the performances are reduced by 10 ÷ 15% and the power consumption is 52 VA.

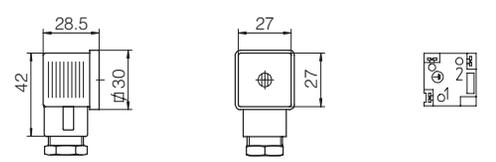
(2) Average values based on tests performed at nominal hydraulic condition and ambient/coil temperature of 20°C.

(3) When solenoid is energized, the inrush current is approx 3 times the holding current.

### 7 ELECTRIC CONNECTORS ACCORDING TO DIN 43650 (to be ordered separately)


**666** = standard connector IP-65, suitable for direct connection to electric supply source.

**667** = as 666, but with built-in signal led.

666, 667 (for AC or DC supply)	CONNECTOR WIRING			
	<p><b>666, 667</b></p> <p>1 = Positive ⊕ 2 = Negative ⊖ ⊕ = Coil ground</p>			
	<p><b>SUPPLY VOLTAGES</b></p>			
	<table border="1"> <tr> <td><b>666</b></td> <td><b>667</b></td> </tr> <tr> <td>All voltages</td> <td>24 AC or DC 110 AC or DC 220 AC or DC</td> </tr> </table>	<b>666</b>	<b>667</b>	All voltages
<b>666</b>	<b>667</b>			
All voltages	24 AC or DC 110 AC or DC 220 AC or DC			

**8 Q/ΔP DIAGRAMS** based on mineral oil ISO VG 46 at 50°C


Spool type	Flow direction				
	P→A	P→B	A→T	B→T	P→T
0, 0/1	A	A	C	C	D
1, 1/1	D	C	C	C	
3, 3/1	D	D	A	A	
4, 4/8, 5, 5/1, 58, 58/1	F	F	G	C	E
1/2, 0/2	D	D	D	D	
6, 7	D	D	D	D	
8	A	A	E	E	
2	D	D			
2/2	F	F			
19, 91	E	E	D	D	
39, 93	F	F	G	G	

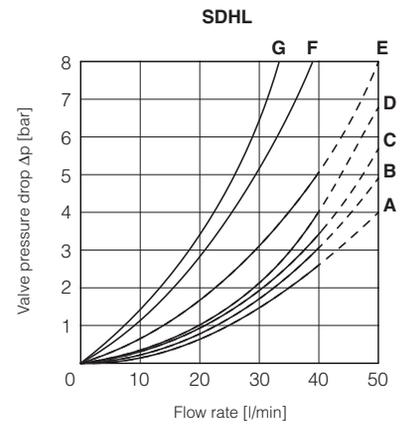


**9 OPERATING LIMITS** based on mineral oil ISO VG 46 at 50°C

The diagrams have been obtained with warm solenoids and power supply at lowest value ( $V_{nom} - 10\%$ ). The curves refer to application with symmetrical flow through the valve (i.e. P→A and B→T). In case of asymmetric flow and if the valves have the devices for controlling the switching times the operating limits must be reduced.

Curve	DC version, spool type:
A	1, 1/2, 8
B	0, 0/1, 0/2, 1/1, 3, 6, 7, 19
C	4, 4/8, 5, 5/1, 19, 39, 58, 58/1, 91, 93
D	2, 2/2

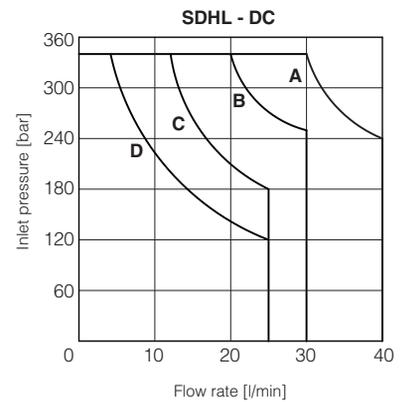

Curve	AC version, spool type:
A	1, 1/2, 8
B	0, 0/1, 0/2, 1/1, 3
C	3, 3/1, 6, 7
D	4, 4/8, 5, 5/1, 19, 39, 58, 58/1, 91, 93
E	2, 2/2

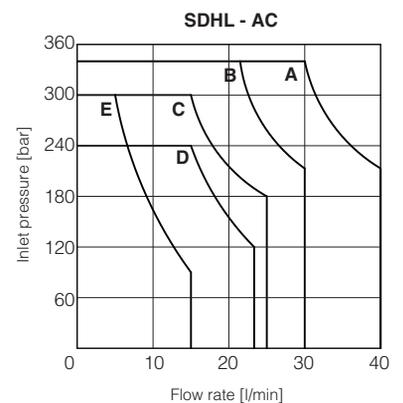

**10 SWITCHING TIMES** (average values in msec)

- Test conditions: - 20 l/min; 150 bar
- nominal voltage
- 2 bar of counter pressure on port T
- mineral oil: ISO VG 46 at 50°C

The elasticity of the hydraulic circuit and the variations of the hydraulic characteristics and temperature affect the response time.

Valve	Switch-on AC	Switch-off AC	Switch-on DC	Switch-off DC
SDHL	10 - 25	20 - 40	30 - 50	15 - 25

**11 SWITCHING FREQUENCY**

Valve	AC (cycles/h)	DC (cycles/h)
SDHL + 666 / 667	7200	15000

**12 DIMENSIONS [mm]**

**ISO 4401: 2005**

**Mounting surface: 4401-03-02-0-05**


Fastening bolts: 4 socket head screws:

M5x30 class 12.9

Tightening torque = 8 Nm


Seals: 4 OR 108

Ports P,A,B,T:  $\varnothing = 7.5$  mm (max)




**P** = PRESSURE PORT  
**A, B** = USE PORT  
**T** = TANK PORT


**SDHL-06(DC)**



Mass: 1,3 kg




**SDHL-07(DC)**

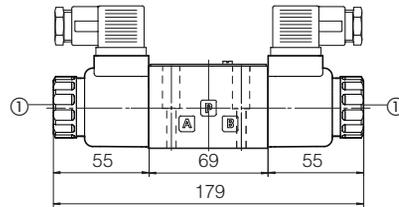


Mass: 1,6 kg


**SDHL-06(AC)**



Mass: 1,2 kg




**SDHL-07(AC)**

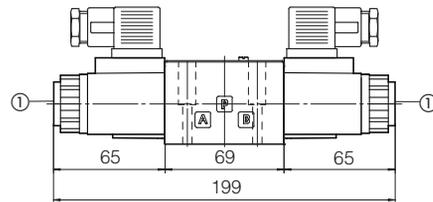


Mass: 1,4 kg

**Option /WP**  
(DC version)



**Option /WP**  
(AC version)



① Standard manual override PIN

⚠ The manual override operation can be possible only if the pressure at T ports is lower than 50 bar

Overall dimensions refer to valves with connector 666

**13 PLUG-IN RESTRICTOR** (to be ordered separately)

The use of plug-in restrictors in valve's ports P or A or B may be necessary in case of particular conditions as long flexible hoses or the presence of accumulators which could cause at the valve switching instantaneous high flow peaks over the max valve's operating limits.

Ordering code:

**PLUG H**

**\*\***

**08, 10, 12, 15** calibrated orifice diameter in tenths of mm

Example PLUG-H-12 = orifice diameter **1,2 mm**

Other orifice dimensions are available on request

