



MODEL
CSAW

Single ball shuttle valve with signal external
CAPACITY: 4,7 L/min. | CAVITY: T-162A



CONFIGURATION

B	Control	External 1/4 BSPP Port
X	Adjustment Range	-
N	Seal Material	Buna-N
(none)	Material/Coating	Standard Material/Coating

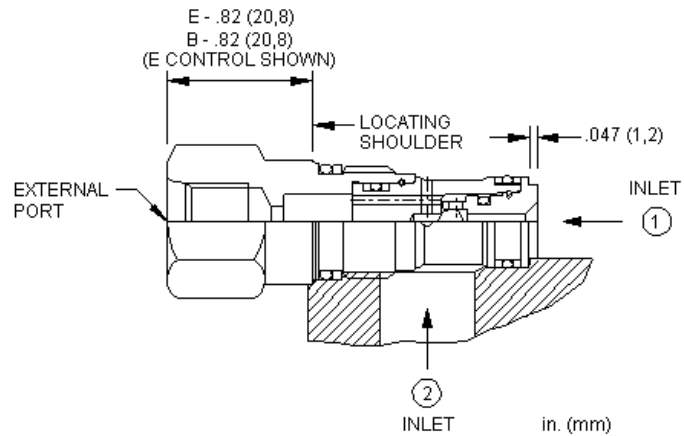

The single ball shuttle connects the higher of two work ports to the signal or common port. The signal is sensed at an external port located in the hex-end of the cartridge.


TECHNICAL DATA

Cavity	T-162A
Series	0
Capacity	4,7 L/min.
Maximum Operating Pressure	350 bar
Maximum Valve Leakage at 110 SUS (24 cSt)	0,3 cc/min.
Valve Hex Size	19,1 mm
Valve Installation Torque	27 - 34 Nm
Seal kit - Cartridge	Buna: 990-162-007
Seal kit - Cartridge	Polyurethane: 990-162-002
Seal kit - Cartridge	Viton: 990-162-006
Model Weight	0.06 kg.

TECHNICAL FEATURES

- Shuttle cartridges feature hardened steel balls and seats for excellent wear characteristics and contamination tolerance.
- The single ball allows for the decay of the pressure signal when both load ports drop to a lower pressure.
- Incorporates the Sun floating style construction to minimize the possibility of internal parts binding due to excessive installation torque and/or cavity/cartridge machining variations.

PERFORMANCE CURVES

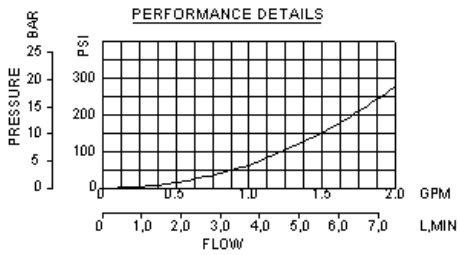

CONFIGURATION OPTIONS

CONTROL

Standard Options	B	External 1/4 BSPP Port
	E	External 4-SAE Port

ADJUSTMENT RANGE

Standard Options	X	-
-------------------------	----------	---

SEAL MATERIAL

Standard Options	N	Buna-N
	V	Viton

MATERIAL/COATING

Standard Options		Standard Material/Coating
	/AP	Stainless Steel, Passivated

Copyright © 2002-2014 Sun Hydraulics Corporation. All rights reserved.